


FLG 40-PowerCross Plus GREEN SP

Green is more beautiful

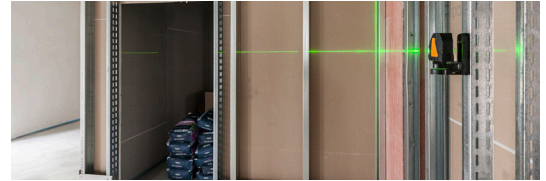

| TECHNICAL DATA | FLG 40-POWERCROSS PLUS GREEN SP | SUPPLIED WITH FLG 40-POWERCROSS PLUS GREEN SP | OPTIONAL |
|--|---------------------------------|---|---|
| | | ART.-NO. 541560 | ART.-NO. 541561 |
| Self-levelling range | ± 3° | <ul style="list-style-type: none"> · Multi-functional mount · 4 x AA Alkaline battery · Padded bag | <ul style="list-style-type: none"> · Charger · Li-Ion batteries |
| Accuracy | ± 3 mm / 10 m | | |
| Working range without receiver | 40 m* (radius) | | |
| Working range with receiver (optional) | 100 m | | |
| Fan angle horizontal | 135° | | |
| Fan angle vertical | 150° | | |
| Power supply | 4 x AA Alkaline | | |
| Operating time (all lines switched on) | 9 h | | |
| Dust / water protection | IP 54 | | |
| Laser diode / class | green / 2 | | |
| Temperature range | -10 °C to +45 °C | | |
| Weight (instrument with battery) | 0,4 kg | | |
| | *depending on room illumination | | |