


FL 70 Premium-Liner SP Selection PRO

Technology at its best

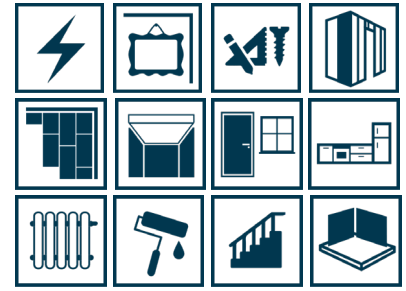

TECHNICAL DATA	FL 70 PREMIUM-LINER SP
Self-levelling range	± 3°
Accuracy	± 1 mm / 10 m
Working range w/o receiver	30 m*
Working range with receiver	80 m
Power supply	Li-Ion
Operating time	6 - 14 h
	depending on number of laser lines switched
Dust / water protection	IP 54
Laser diode	635 nm
Laser class	2
Temperature range	-10°C to +45°C
	* depending on room illumination

FEATURES
<ul style="list-style-type: none"> · 5 laser crosses · 4 vertical lines at 90° to each other · 360° horizontal line · Laser cross to the ceiling · Plumb down beam · Self-levelling function can be switched off · Use with receiver FR 55 to extend working range up to 80 m · Remote control for setting slopes · Adjustable 360° circle · Slow motion screw · Audible and visible alarm when out of level · Integrated floor tripod · 5/8" thread for use with standard tripod

SUPPLIED WITH FL 70 PREMIUM-LINER SP WITHOUT FR 55

ART.-NO. 582010
<ul style="list-style-type: none"> · Integrated floor tripod · Remote control · Li-Ion batteries and battery charger · Magnetic target · Laser glasses · Adapter for tripod connection · Compartment for alkaline batteries · Container