


Electronic Torque Wrench

- Electronic torque value readout
- Peak hold and track mode selection
- Angle accuracy (34387/34487)
- Buzzer and LED indicator for presetting target torque
- Engineering units (Nm, ft.lb, in.lb, kgf.m) adjustment
- Switch off automatically after 80 seconds
- DIN ISO 6789 & ASME B107.300-2010
- CW $\pm 2\%$ and CCW $\pm 3\%$ operation

1 Nm = 0.738 ft.lb. = 0.102 kgf.m
 1 ft.lb. = 1.356 Nm = 0.138 kgf.m
 1 in.lb. = 0.113 Nm = 1.152 kgf.cm




• Electronic Torque Wrench (34367-2AG, 34467-1AG)

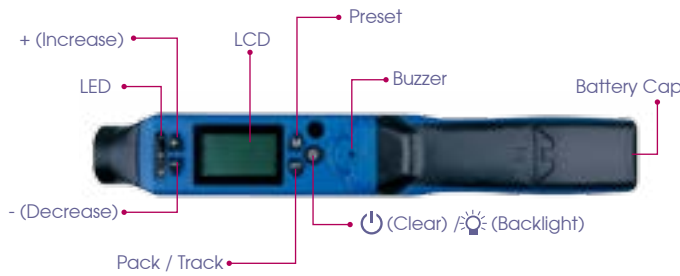

Torque Accuracy	CW $\pm 2\%$ / CCW $\pm 3\%$
Preset function	10
Display Resolution	0.1 Nm/ ft.lb. ,0.01 kgf.m, 1.0 lb.in
Operation Mode	Peak/Track
Unit Selection	kg.m, lb.in, lb.ft, Nm
Gear Teeth	36
Battery	AAA x 3 PC.
Battery Life	110 hrs (continuous operation)
Operating Ambient Temperature	-10°C- 60°C (13.9°F-139.9°F)
Storage Temperature	-20°C-70°C (-4°F-157.9°F)
Operating Relative Humidity	15 to 90% noncondensing
Switch off Automatically	80 seconds (if do not use torque wrench)
Angle Accuracy	($\pm 1\%$ of reading)+($\pm 1\%$ @angular velocity $> 10^\circ/\text{sec} < 180^\circ/\text{sec}$)+ ($\pm 1\%$ of Text Texture)
Angle	0°~360° (34387-2AG,34487-1AG)

• Electronic Torque Angle-controlled Wrench (34387-2AG, 34487-1AG)

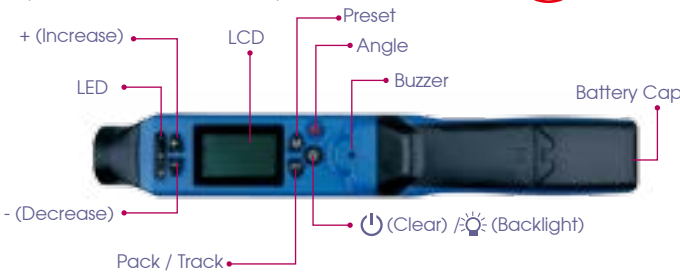

Dual Scale - English & Newton Meter (in. lb. / ft. lb. & Nm / kg.m)

KT NO.	Square Drive	Torque Range				Overall Length mm		
		Nm	ft. lb.	in. lb.	kg.m			
34367-2AG	3/8"	27-135 Nm	19.9-99.6 ft. lb.	239~1195 in. lb.	2.75~13.76 kgf.m	460	1400	1 / 6
34467-1AG	1/2"	40-200 Nm	29.5-147.5 ft. lb.	354~1770 in. lb.	4.08~20.38 kgf.m	530	1500	1 / 6
34387-2AG	3/8"	27-135 Nm	19.9-99.6 ft. lb.	239~1195 in. lb.	2.75~13.76 kgf.m	460	1400	1 / 6
34487-1AG	1/2"	40-200 Nm	29.5-147.5 ft. lb.	354~1770 in. lb.	4.08~20.38 kgf.m	530	1500	1 / 6



- Do not press "M" and "⏻" button together otherwise system will enter in calibration mode.
- Switch off the power after use.