

OVERLOAD RELAY 50...200 A FOR MOTOR PROTECTION SIZE S6, CLASS 5...30 MOUNT. ONTO CONT./ STAND-ALONE MAIN CIRCUIT: BAR CONNECTION AUX. CIRCUIT: SCREW CONNECTION MANUAL-AUTOMATIC-RESET INT. EARTH FAULT DETECTION



Figure similar

product brand name	SIRIUS
Product designation	solid-state overload relay

**General technical data:**

Size of contactor can be combined company-specific	S6
Power loss [W] total typical	0.05 W
Insulation voltage <ul style="list-style-type: none"> <li>• with degree of pollution 3 rated value</li> </ul>	1 000 V
Surge voltage resistance rated value	8 kV
Protection class IP <ul style="list-style-type: none"> <li>• on the front</li> </ul>	IP20
Shock resistance	15g / 11 ms
Type of protection	PTB 06 ATEX 3001 Ex II (2) GD
Equipment marking acc. to DIN EN 81346-2	F

**Ambient conditions:**

Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	

<ul style="list-style-type: none"> <li>• during operation</li> </ul>	-25 ... +60 °C
<ul style="list-style-type: none"> <li>• during storage</li> </ul>	-40 ... +80 °C
<ul style="list-style-type: none"> <li>• during transport</li> </ul>	-40 ... +80 °C
<b>Relative humidity during operation</b>	95 %

#### Main circuit:

<b>Number of poles for main current circuit</b>	3
<b>Adjustable pick-up value current of the current-dependent overload release</b>	50 ... 200 A
<b>Operating voltage</b>	
<ul style="list-style-type: none"> <li>• at AC-3 rated value maximum</li> </ul>	1 000 V

#### Auxiliary circuit:

<b>Number of NC contacts</b>	
<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>	1
<b>Number of NO contacts</b>	
<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>	1
<b>Number of CO contacts</b>	
<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>	0
<b>Operating current of auxiliary contacts at AC-15</b>	
<ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 110 V</li> <li>• at 120 V</li> <li>• at 125 V</li> <li>• at 230 V</li> </ul>	4 A 4 A 4 A 4 A 3 A
<b>Operating current of auxiliary contacts at DC-13</b>	
<ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 60 V</li> <li>• at 110 V</li> <li>• at 125 V</li> </ul>	2 A 0.55 A 0.3 A 0.3 A

#### Short-circuit protection

<b>Design of the fuse link</b>	
<ul style="list-style-type: none"> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>	fuse gG: 6 A

#### Installation/ mounting/ dimensions:

<b>Mounting position</b>	any
<b>Mounting type</b>	direct mounting / stand-alone installation
<b>Height</b>	119 m
<b>Width</b>	120 m
<b>Depth</b>	155 m
<b>Required spacing</b>	
<ul style="list-style-type: none"> <li>• with side-by-side mounting</li> <li>— forwards</li> </ul>	0 m

— Backwards	0 m
— upwards	0 m
— downwards	0 m
— at the side	0 m
• for grounded parts	
— forwards	0 m
— Backwards	0 m
— upwards	0 m
— at the side	6 m
— downwards	0 m
• for live parts	
— forwards	0 m
— Backwards	0 m
— upwards	0 m
— downwards	0 m
— at the side	6 m

#### Connections/ Terminals:

<b>Product function</b>	
• removable terminal for auxiliary and control circuit	Yes
<b>Type of electrical connection</b>	
• for main current circuit	busbar connection
• for auxiliary and control current circuit	screw-type terminals
<b>Type of connectable conductor cross-sections</b>	
• for auxiliary contacts	
— solid	0.5 ... 4 mm <sup>2</sup> , 2x (0.5 ... 2.5 mm <sup>2</sup> )
• at AWG conductors for auxiliary contacts	2x (20 ... 14)

#### Electromagnetic compatibility:

<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>	10 V/m
<b>Electrostatic discharge acc. to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge

#### Certificates/approvals

General Product Approval	EMC	For use in hazardous locations
--------------------------	-----	--------------------------------



Declaration of Conformity	Test Certificates	Shipping Approval
---------------------------	-------------------	-------------------



[Typprüfbescheinigung/Werkszeugnis](#)

[spezielle Prüfbescheinigungen](#)



Shipping Approval	other
-------------------	-------



[Umweltbestätigung](#)

[sonstig](#)

[Bestätigungen](#)

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB2153-4FC2>

##### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB2153-4FC2>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB2153-4FC2>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RB2153-4FC2&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB2153-4FC2&lang=en)

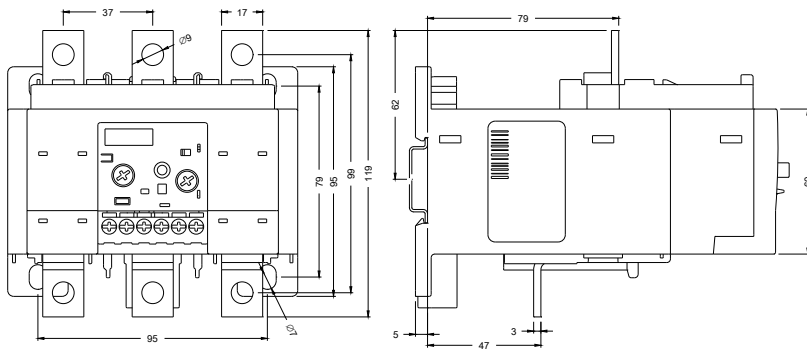

last modified:

07/07/2016