

**SMA PIN Diode Switch SP3T From
 4 GHz to 8 GHz Rated at +20 dBm**

FMSW6273 is a Single Pole Triple Throw (SP3T) Reflective PIN Diode Switch that operates from 4 GHz to 8 GHz. Typical performance includes < 2.0 dB insertion loss, > 75 dB isolation, and < 100 nsec switching speed. The design incorporates TTL compatible driver circuitry for accurate logic control. Operational temperature range is -55°C to +85°C and dual voltage controls of +5 DC and -15 DC are required. The rugged package is designed to meet a series of MIL-STD-202F environmental conditions including humidity, shock, vibration, and temperature cycle. Package interfaces include solder terminals and female SMA connectors.



Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	4		8	GHz
Impedance		50		Ohms
VSWR		1.6:1		
Insertion Loss		2		dB
Isolation		75		dB
Rise Time			75	ns
Switching Time			100	ns
Input Power (CW)			0.1	Watts
Survival Power			1	Watts
Positive Operating Voltage		5		V
Negative Operating Voltage		-15		V
Current @ 5 V		150		mA
Current @ -15 V		75		mA
Operating Temperature	-55		+85	deg C

Mechanical Specifications

Length	1.5 in [38.1 mm]
Width	1.5 in [38.1 mm]
Height	0.4 in [10.16 mm]
Weight	0.1072 lbs [48.63 g]
Finish	Blue

Configuration

Package Type	Connectorized Module
Design	SP3T, Reflective
RF Connector	SMA Female
Control Connector	Pin

Environmental Specifications

Temperature

Operating Range	-55 to +85 deg C
Storage Range	-65 to +125 deg C

Humidity	MIL-STD-202F, Method 103B, Condition B
----------	--

Shock	MIL-STD-202F, Method 213B, Condition B
-------	--

Features:

- SP3T Reflective Switch
- 4.0 GHz to 8.0 GHz
- Insertion Loss 2.0 dB typ
- Isolation 75 dB typ
- Power Input 20 dBm CW max
- Field Replaceable Connectors

Applications:

- Test & Measurement
- Military Communication
- Commercial Communication
- Wireless Communications
- SATCOM
- Military Electronic Systems
- RF Test Stations

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Vibration
Altitude
Temperature Cycling
ESD Sensitivity

MIL-STD-202F, Method 204D, Condition B
MIL-STD-202F, Method 105C, Condition B
MIL-STD-202F, Method 107D, Condition A
ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.




Compliance Certifications (visit www.FairviewMicrowave.com for current document)

REACH Compliant



12/17/2015


Plotted and Other Data

Notes:

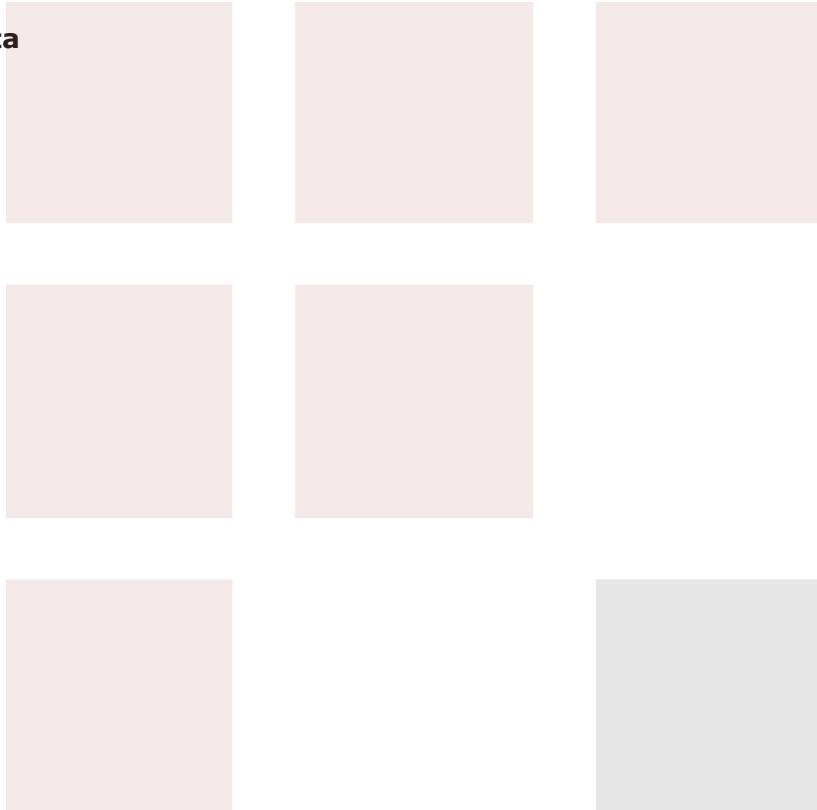

Typical Performance Data

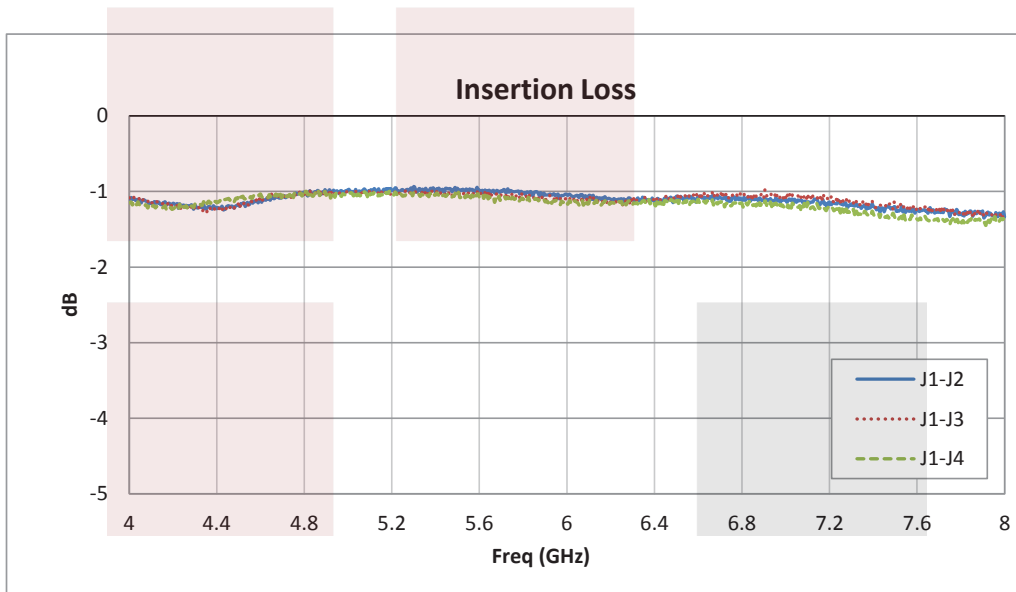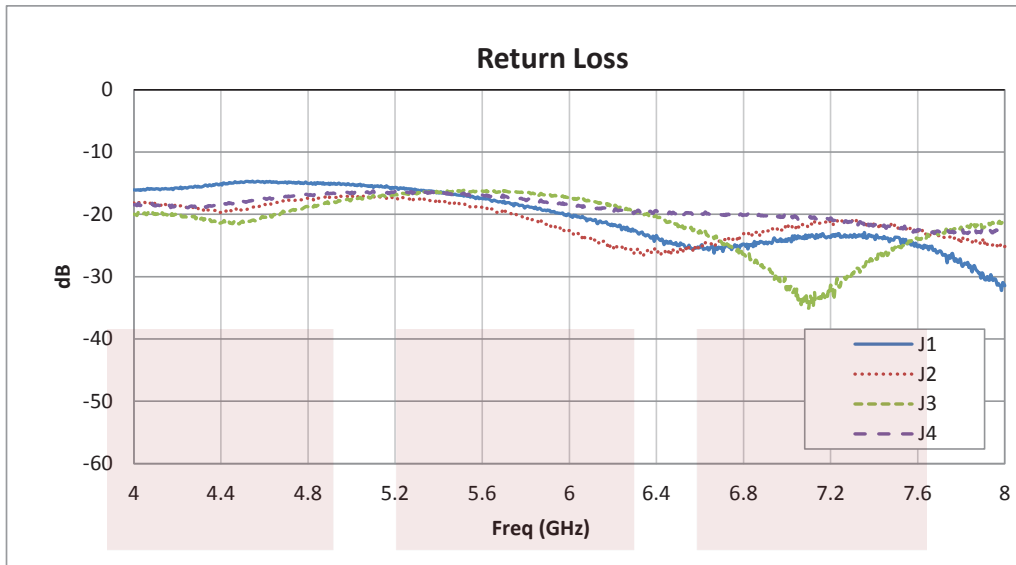

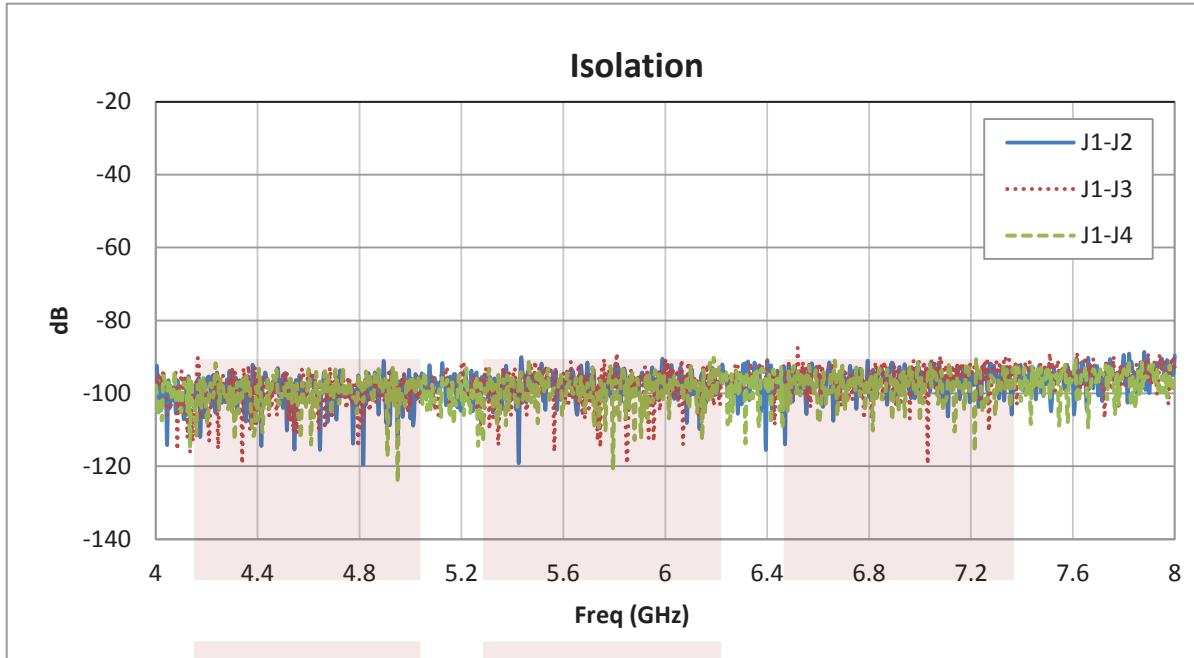


SMA PIN Diode Switch SP3T From 4 GHz to 8 GHz Rated at +20 dBm from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SMA PIN Diode Switch SP3T From 4 GHz to 8 GHz Rated at +20 dBm FMSW6273](http://www.fairviewmicrowave.com/sma-pin-diode-switch-sp3t-4-8-ghz-rated-20-dbm-fmsw6273-p.aspx)

URL: <http://www.fairviewmicrowave.com/sma-pin-diode-switch-sp3t-4-8-ghz-rated-20-dbm-fmsw6273-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

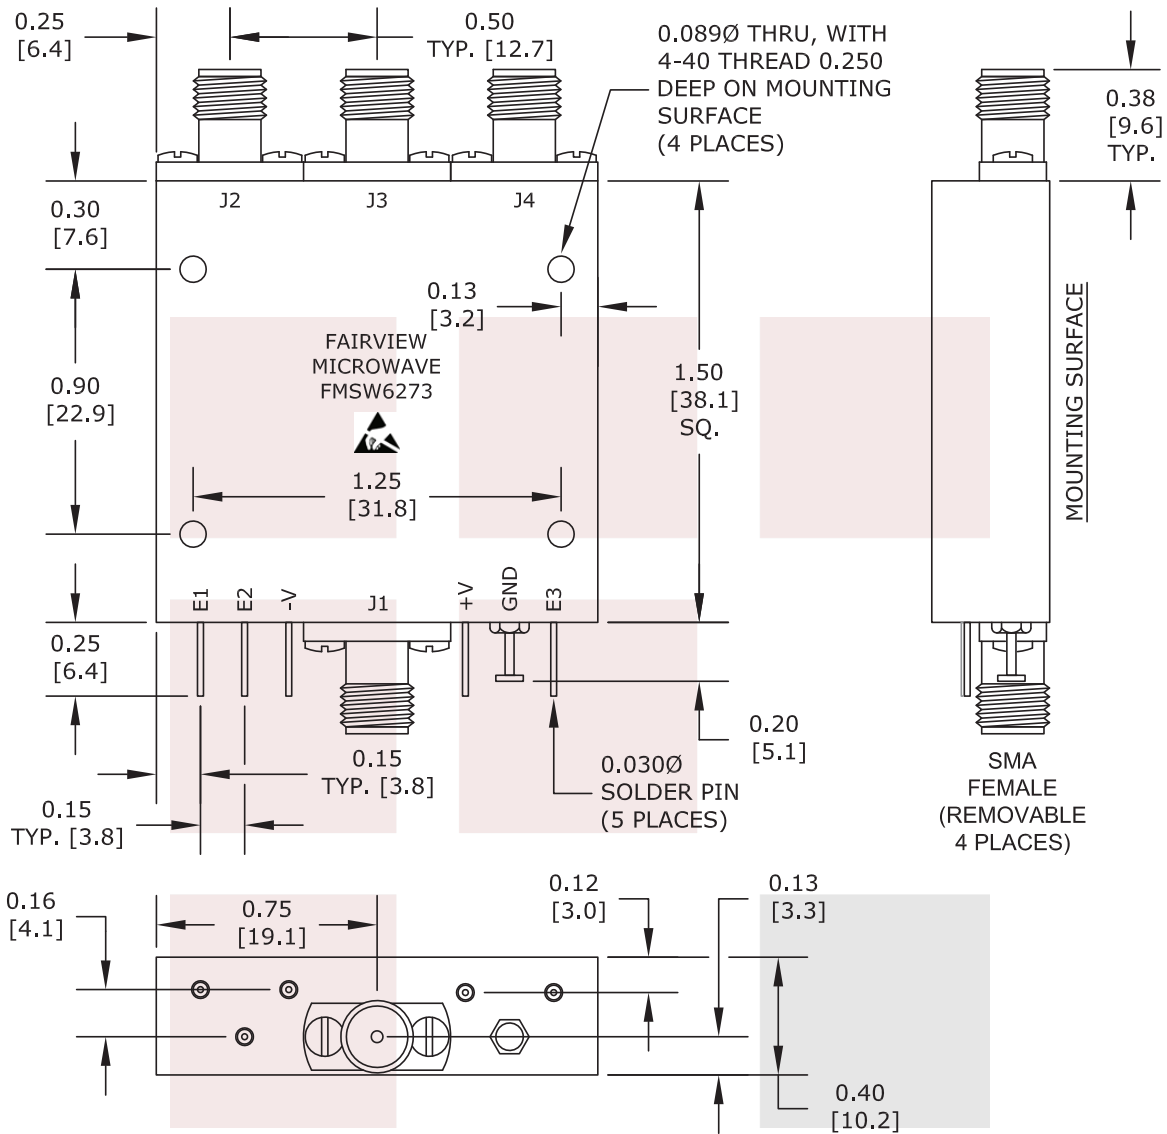

3 BIT TTL LOGIC TABLE

E1	E2	E3	FUNCTION
0	1	1	J1-J2 LOW LOSS
1	0	0	J1-J3 LOW LOSS
1	1	0	J1-J4 LOW LOSS

ALL DIMENSIONS ARE IN INCHES.
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

FAIRVIEW MICROWAVE INC.
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

TITLE
SMA PIN Diode Switch SP3T From 4 GHz to 8 GHz
Rated at +20 dBm

DWG NO	FMSW6273	CAGE CODE	3FKR5		
CAD FILE	021616	SHEET	SCALE	N/A	SIZE A 2233