

Field Replaceable SMA SP4T PIN Diode Switch
From 1 GHz to 2 GHz Rated at +20 dBm

FMSW6278 is a Single Pole Four Throw (SP4T) Reflective PIN Diode Switch that operates from 1 GHz to 2 GHz. Outstanding performance includes 1.0 dB typ insertion loss, 60 dB min isolation, and 100 nsec max switching speed. The design incorporates TTL compatible driver circuitry for accurate logic control. Operational temperature range is -55°C to +85°C and dual voltage controls of +5 DC and -15 DC are required. The rugged package is designed to meet a series of MIL-STD-202F environmental conditions including humidity, shock, vibration, and temperature cycle. Package interfaces include solder terminals and female SMA connectors.



Electrical Specifications

| Description | Min | Typ | Max | Units |
|----------------------------|-----|-----|-----|-------|
| Frequency Range | 1 | | 2 | GHz |
| Impedance | | 50 | | Ohms |
| Insertion Loss | | 1 | | dB |
| Isolation | 60 | | | dB |
| Switching Time | | | 100 | ns |
| Input Power (CW) | | | 0.1 | Watts |
| Survival Power | | | 1 | Watts |
| Positive Operating Voltage | | 5 | | V |
| Negative Operating Voltage | | -15 | | V |
| Current @ 5 V | | 200 | | mA |
| Current @ -15 V | | 75 | | mA |
| Operating Temperature | -55 | | +85 | deg C |

Mechanical Specifications

| | |
|--------|----------------------|
| Length | 1.25 in [31.75 mm] |
| Width | 1.25 in [31.75 mm] |
| Height | 0.4 in [10.16 mm] |
| Weight | 0.0788 lbs [35.74 g] |
| Finish | Blue |

Configuration

| | |
|-------------------|------------------|
| Design | Reflective, SP4T |
| RF Connector | SMA Female |
| Control Connector | Solder Pin |

Environmental Specifications

Temperature

| | |
|-----------------|-------------------|
| Operating Range | -55 to +85 deg C |
| Storage Range | -65 to +125 deg C |

| | |
|-----------|--|
| Humidity | MIL-STD-202F, Method 103B, Condition B |
| Shock | MIL-STD-202F, Method 213B, Condition B |
| Vibration | MIL-STD-202F, Method 204D, Condition B |
| Altitude | MIL-STD-202F, Method 105C, Condition B |

Features:

- SP4T Reflective Switch
- 1.0 GHz to 2.0 GHz GHz
- Insertion Loss 1.0 dB typ
- Isolation 60 dB min
- Power Input 20 dBm CW max
- Field Replaceable Connectors

Applications:

- Test & Measurement
- Military Communication
- Commercial Communication
- Wireless Communications
- SATCOM
- Military Electronic Systems
- RF Test Stations

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Temperature Cycling
ESD Sensitivity


MIL-STD-202F, Method 107D, Condition A
ESD Sensitive Material, Transport material in Approved ESD bags. Handle only
in ESD Workstation.





Compliance Certifications (visit www.FairviewMicrowave.com for current document)
REACH Compliant 12/17/2015


Plotted and Other Data

Notes:

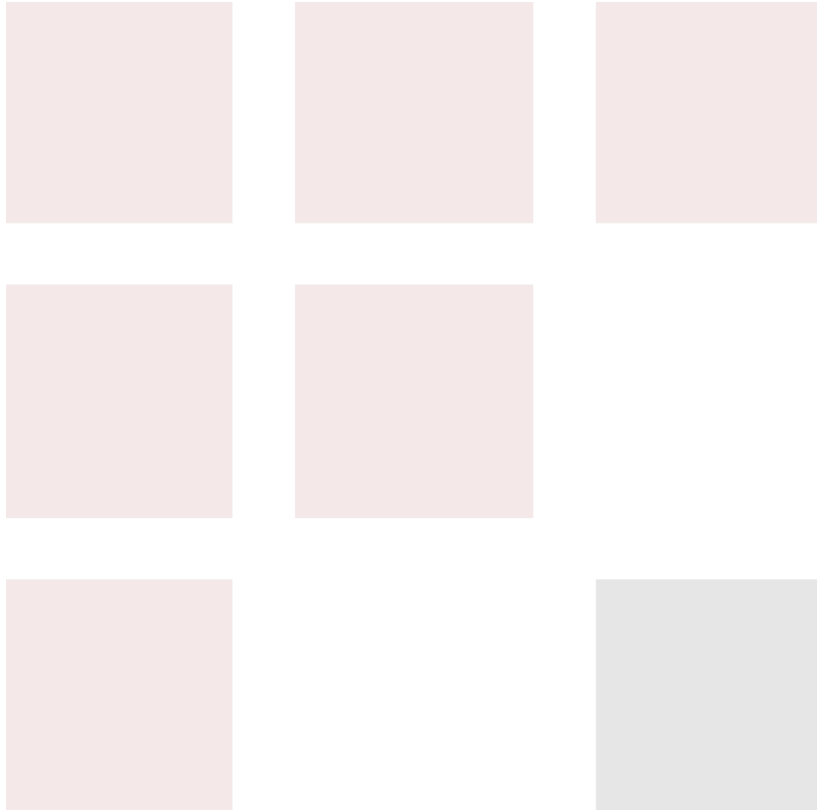

Typical Performance Data

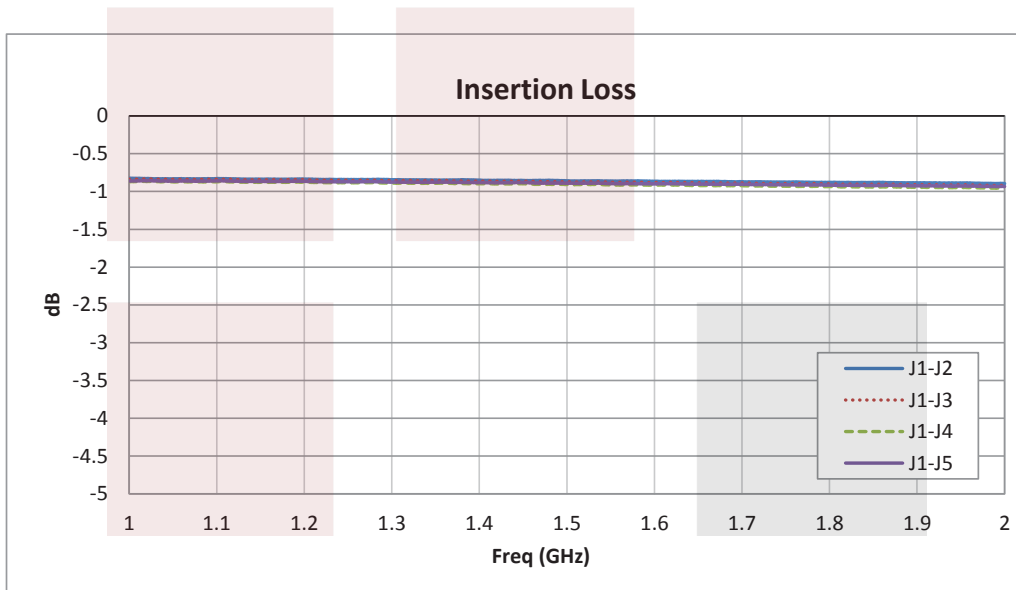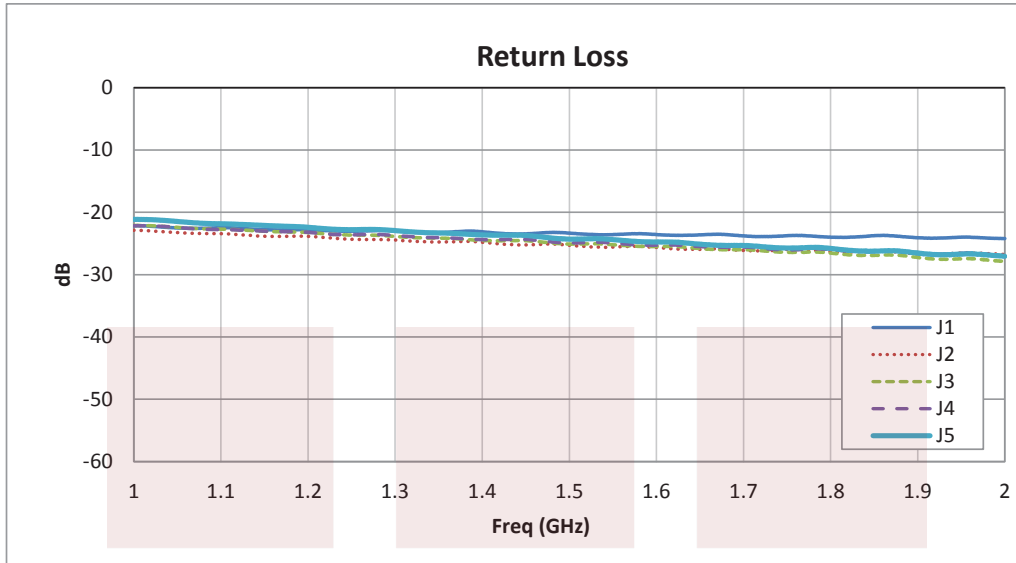

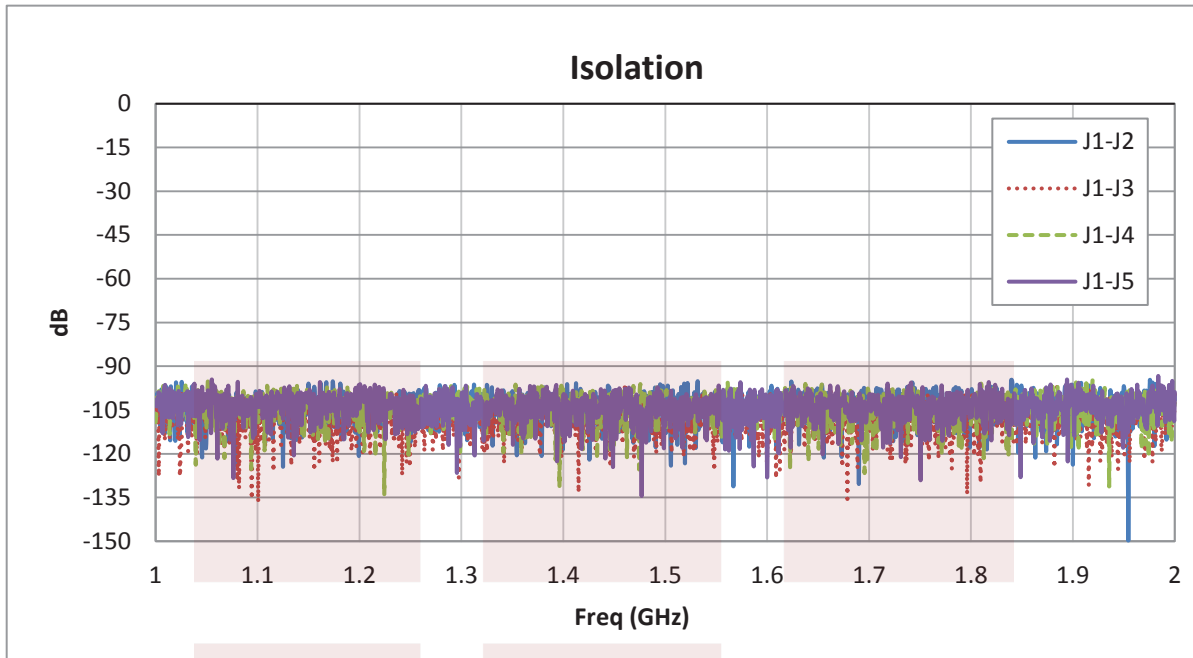


Field Replaceable SMA SP4T PIN Diode Switch From 1 GHz to 2 GHz Rated at +20 dBm from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Field Replaceable SMA SP4T PIN Diode Switch From 1 GHz to 2 GHz Rated at +20 dBm FMSW6278](http://www.fairviewmicrowave.com/sma-sp4t-pin-diode-switch-1-2-ghz-20-dbm-fmsw6278-p.aspx)

URL: <http://www.fairviewmicrowave.com/sma-sp4t-pin-diode-switch-1-2-ghz-20-dbm-fmsw6278-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

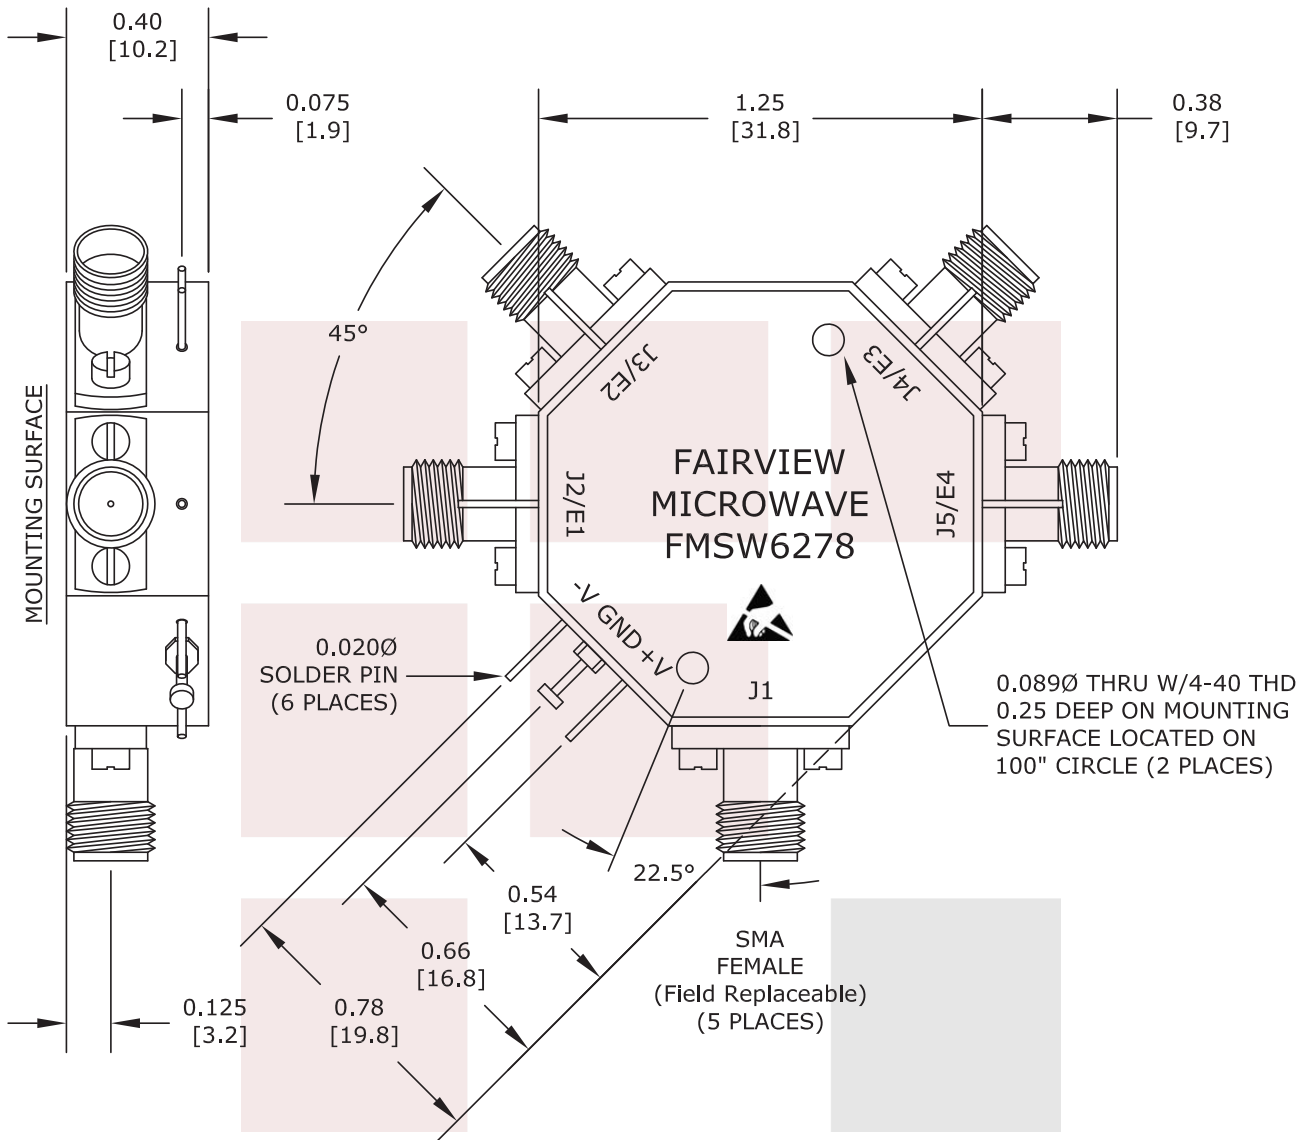

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN: inches [mm]
 TOLERANCES ARE:
 X.XX ± 0.020 [± 0.508]
 X.XXX ± 0.010 [± 0.254]

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

| TTL LOGIC TABLE | | | | |
|-----------------|----|----|----|----------|
| E1 | E2 | E3 | E4 | Low Loss |
| 0 | 1 | 1 | 1 | J1-J2 |
| 1 | 0 | 1 | 1 | J1-J3 |
| 1 | 1 | 0 | 1 | J1-J4 |
| 1 | 1 | 1 | 0 | J1-J5 |

NOTE:
 0 = LOW LOSS
 1 = ISOLATION

| | | | | |
|---|--------------------|---|-----------|------|
| FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | | NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. | | |
| TITLE Field Replaceable SMA SP4T PIN Diode Switch From 1 GHz to 2 GHz Rated at +20 dBm | DWG NO FMSW6278 | CAGE CODE 3FKR5 | | |
| CAD FILE 040116 | SHEET | SCALE N/A | SIZE A | 2233 |