



75 Ohm BNC Female to BNC Female Adapter

75 ohm BNC female to BNC female adapter part number SM3417 from Fairview Microwave is in-stock and ships same day. This Fairview BNC to BNC adapter has a female to female gender configuration. SM3417 BNC female to BNC female adapter operates to 4 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		4	GHz
VSWR			1.2:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

Length

1.281 in [32.54 mm]

Weight

0.02249 lbs [10.2 g]

Description	Connector 1	Connector 2
Туре	BNC Female	BNC Female
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	MIL-STD-348

Material Specifications

Description	Connector 1	Connector 2		
Туре	BNC Female	BNC Female		
Contact Plating	Gold	Gold		
Contact Plating Spec.	MIL-G-45204	MIL-G-45204		
Outer Contact Material	Brass	Brass		
Outer Contact Plating	Nickel	Nickel		
Outer Contact Plating Spec.	QQ-N-290	QQ-N-290		

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C



Configuration:

- BNC Female Connector 1
- BNC Female Connector 2
- 75 Ohm
- Straight Body Geometry

Features:

- VSWR of 1.2:1 max up to 4 GHz
- BNC interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Contact

Applications:

- · General Purpose Test
- CATV

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

75 Ohm BNC Female to BNC Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: 75 Ohm BNC Female to BNC Female Adapter SM3417

URL: https://www.fairviewmicrowave.com/75-ohm-bnc-female-bnc-female-adapter-sm3417-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





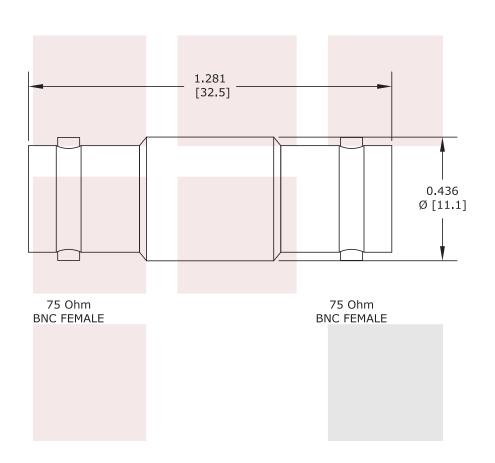

STANDARD TOLERANCES

.X ±0.2 .XX ±0.1 .XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
75 Ohm BNC Female to BNC Female Adapter	DWG NO SM3417			CAGE CODE 3FKR5		
	CAD FILE 102416	SHEET	SCAL	E N/A	SIZE A	2233