



SMC Male to BNC Male Adapter

SMC male to BNC male adapter part number SM3684 from Fairview Microwave is in-stock and ships same day. This Fairview SMC to BNC adapter has a male to male gender configuration. SM3684 SMC male to BNC male adapter operates to 4 GHz. The Fairview Microwave RF adapter provides good VSWR of 1.35:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Barantakian

Description		Min	Тур	Max		Units
Frequency Range		DC			GHz	
VSWR				1.	35:1	
Specifications	by Freque	ency				
Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 2	2 to 4				GHz
VSWR. Max	1 2 · 1	1.35:1				

Mechanical Specifications

Size Length Width Weight

1.19 in [30.23 mm] 0.56 in [14.22 mm] 0.02998 lbs [13.6 g]

Description	Connector 1	Connector 2
Туре	SMC Male	BNC Male
Polarity	Standard	Standard
Hex Size	1/4 inch	



Configuration:

- SMC Male Connector 1
- BNC Male Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.35:1 max up to 4 GHz
- Contact plating according to MIL-G-45204
- Gold Plated Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications


Description	Connector 1	Connector 2	
Туре	SMC Male	BNC Male	
Contact Material	Beryllium Copper	Brass	
Contact Plating	Gold	Gold	
Contact Plating Spec.	MIL-G-45204	MIL-G-45204	
Insulation Material	PTFE	PTFE	
Body Material	Brass	Brass	
Body Plating	Nickel	Nickel	

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

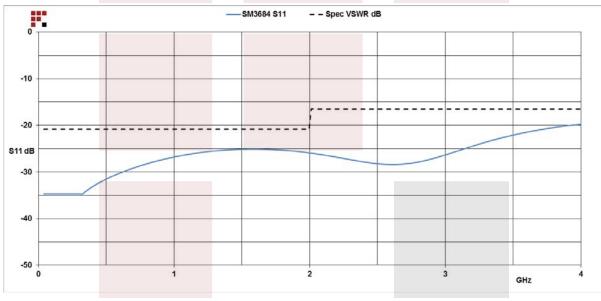

SMC Male to BNC Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: SMC Male to BNC Male Adapter SM3684


URL: https://www.fairviewmicrowave.com/smc-male-bnc-male-adapter-sm3684-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





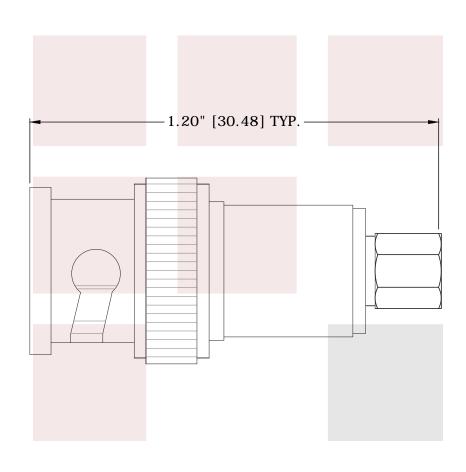

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
SMC Male to BNC Male Adapter	DWG NO SM3684			CAGE CODE 3FKR5		
	CAD FILE 061815	SHEET	SCALE	E N/A	SIZE A	5568