

SMA DIRECTIONAL COUPLERS 1-4GHZ

MC2104-XX

SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 1-4 GHZ
 VSWR 1.25:1 MAX
 POWER CW: 50 WATTS
 POWER PEAK: 3KW
 DIRECTIVITY: 20 DB MIN
 TRUE LOSS: THRU: 6DB: 2.75 DB
 TRUE LOSS: THRU: 10DB: 1.3 DB
 TRUE LOSS: THRU: 20DB: 0.5 DB
 FLATNESS: +/- 0.6DB
 IMPEDANCE: 50 OHMS
 ROHS COMPLIANT

MECHANICAL:


CONNECTORS: NICKEL PLATED BRASS
 CONNECTOR CONTACTS: AU PLATING

ENVIRONMENTAL:

TEMP: -55 C TO +125 C

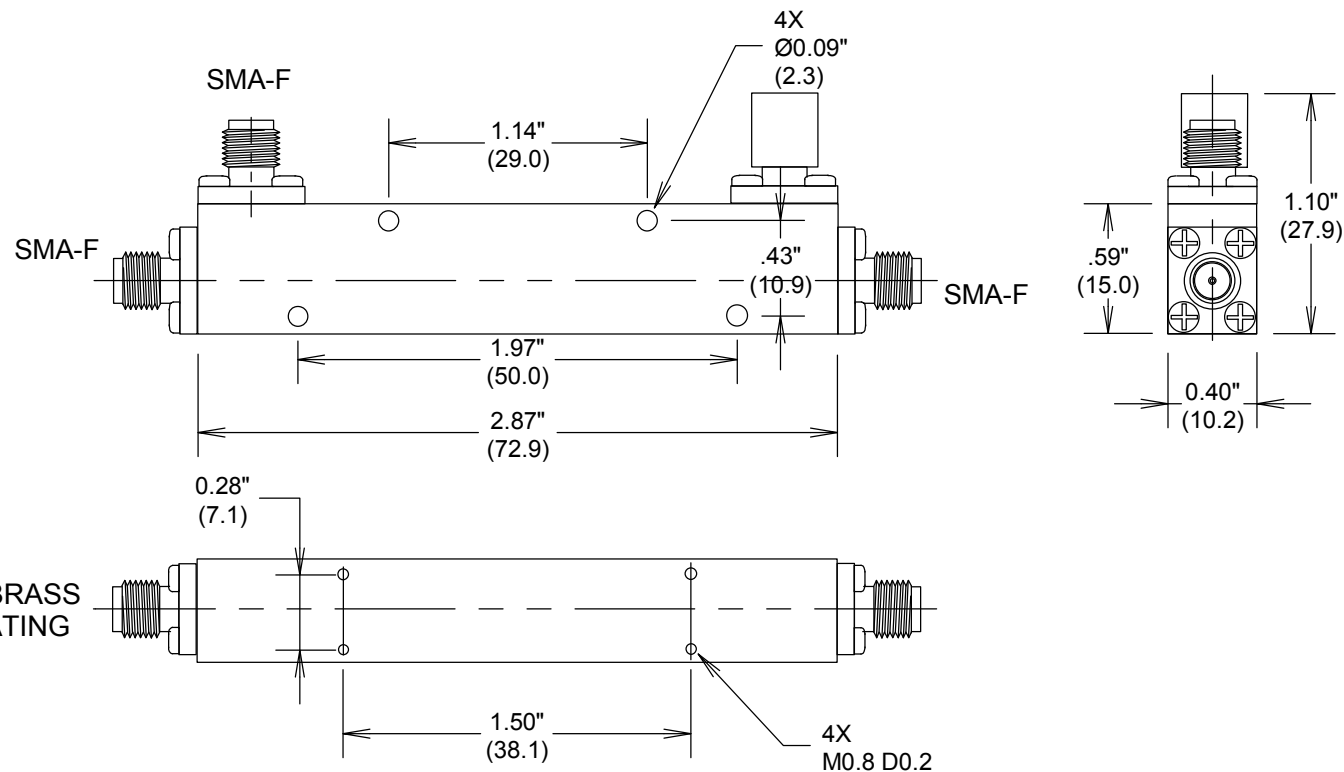

MEASUREMENTS BELOW ARE TYPICAL

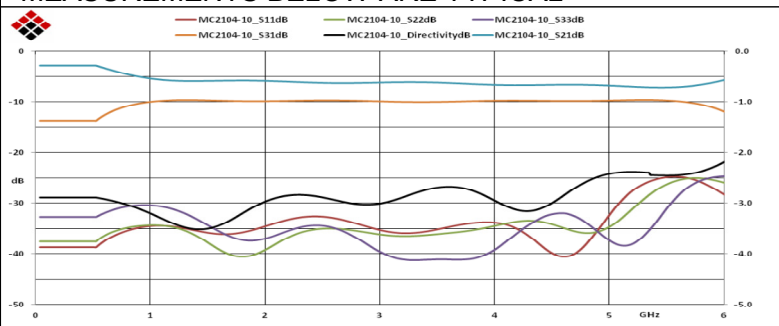

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA DIRECTIONAL COUPLERS 1-4GHZ

SIZE

A

CAGE CODE

3FKR5

DWG NO

MC2104-XX

REV

C

SCALE

SHEET