



infiTOF-UHV

Hi-Resolution & Compact TOF-MS



**Portable size Time of Flight (TOF) Mass Spectrometer,
Realized by the innovative multi-turn technology.**




**The portable TOF-MS performs High Precision,
High Resolution and Real-Time Analysis.**

High Performance and Small Foot print Time of Flight Mass Spectrometer by using the Multi-turn Technology

infiTOF-UHV

Hi-Resolution & Compact TOF-MS

There are four orbiting electrodes and two injection/ejection electrodes on a palm-sized optics bench. The ion source gives kinetic-energy for orbiting motion in the infinit loop. Injection and ejection electrodes are synchronized with ion source pulsing triggering. Injection electrodes has to be in the on state while ions enter the analyzer, then has to be turned off before first ion (smallest ion) returns to it. Orbiting electrodes are constant, so orbiting ion can be held until ejection electrode is ON.

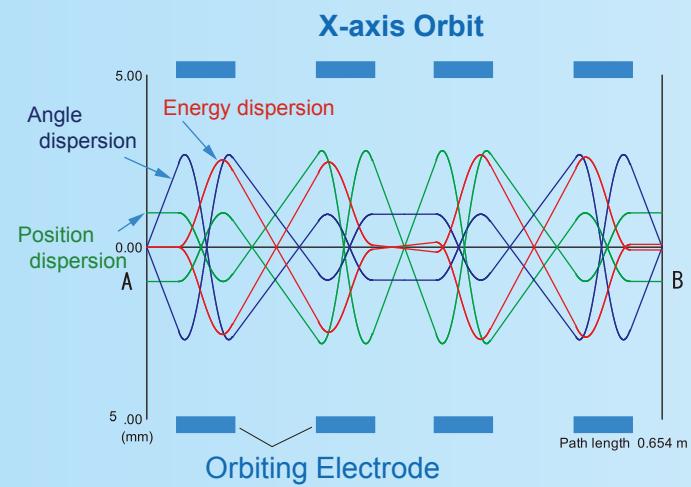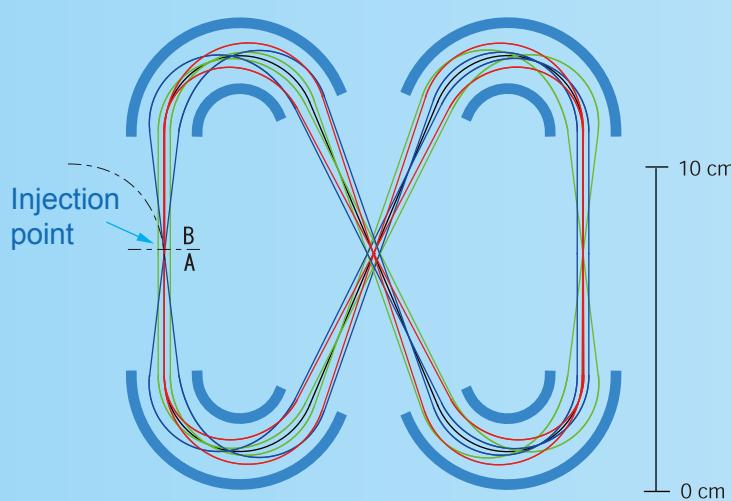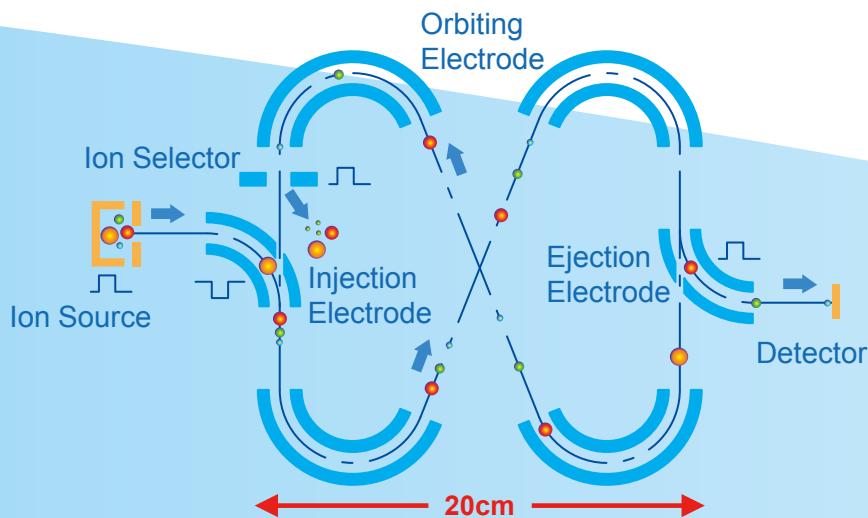


$$x_{\max} = 0.001, \alpha_{\max} = 0.060, \delta_{\max} = 0.100$$

"Perfect focusing"


The same kind of technologies such as multi-reflection-TOF are exist, but they usually have a measurable trade-off between sensitivity and resolution.

The patented multi-turn optics made "perfect focusing" come true, and losing ions are about 1 to 2% per turn, which is related to mean free path in vacuum.

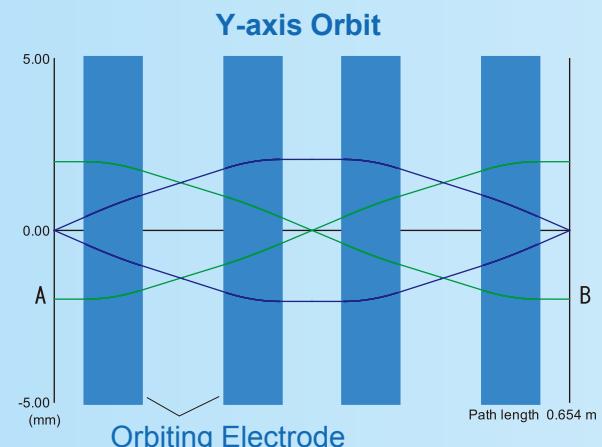


1. High-resolution separation of low molecular weight gases

Separation for m/z 3

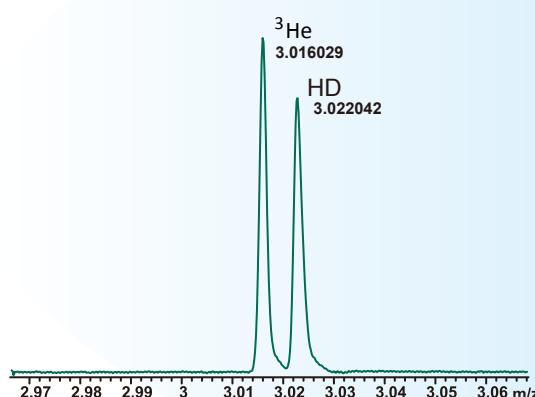


Separation for m/z 4

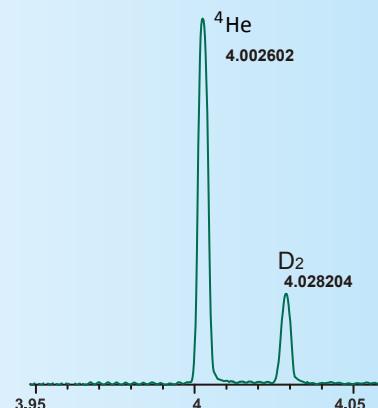


MSI
TOKYO
A Kanomax company


Separation for ammonium water

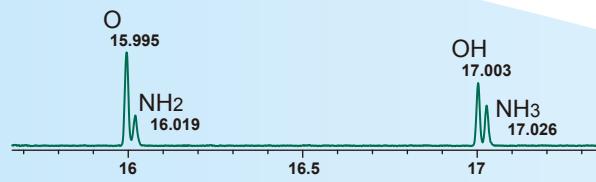

Separation for m/z 28

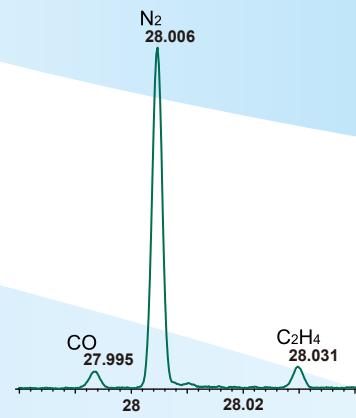


Separation for CO_2 & N_2O (m/z 44)

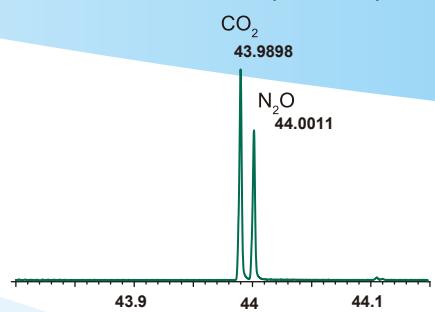

2. Process gases in "silane std gas"

< Silane 10ppm N₂ base >

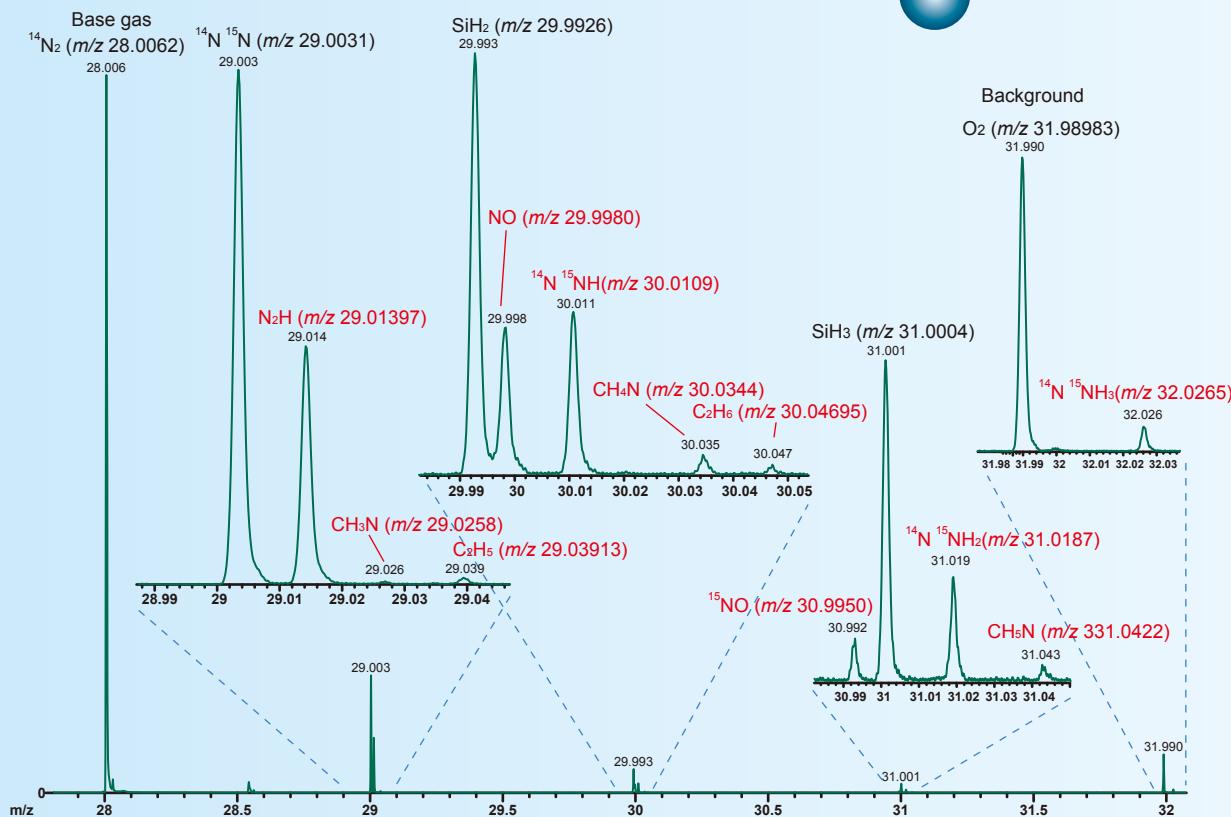

Specification

Resolution	>30,000 (FWHM)
Mass range	1 to 1,000 m/z
ion-source	EI (Pos)
Mass accuracy	<0.002u (Internal Std) <0.005u (External Std)
Sensitivity	in air ^{38}Ar (5.9ppm in air) S/N>10 in Helium CH ₄ , N ₂ 1ppm S/N>10
Data recording speed	up to 20spectra/sec
Dimensions(mm)	W215 x H545 x D610
Weight	45kg



infiTOF-UHV

with GC (optional)



infiTOF-UHV & GasTrace(GC)

Pittcon2010
Bronze Award



KANOMAX
The Ultimate Measurements

KANOMAX JAPAN INC.

2-1 Shimizu Saita-shi, Osaka 565-0805 JAPAN
TEL: +81-6-6877-0177
FAX: +81-6-6877-6849
E-mail: aerosol@kanomax.co.jp
URL: <http://www.kanomax.co.jp/>