



XIAMEN TOB NEW ENERGY TECHNOLOGY CO., LTD.

Provide A Full Set Of Solutions For Battery Machines.

SALES tob.amy@tobmachine.com

TECH SUPPORT +86-18120715609

Search..



Film Coating Machine With Dryer



The film coating machine is mainly used for lithium battery electrode coating for coin cell assemble and pouch cell research.

- Item No.:TOB-VFC-150
- Order(Moq):1
- Payment:L/C,T/T,Western Union
- Product Origin:China
- Shipping Port:XIAMEN
- Lead Time:7

Product Detail

Touch Screen Compact Tape Casting Film Coating Machine with Dryer, Vacuum Pump & Adjustable Film Applicator

SPECIFICATIONS


- 1 The TOB-VFC-150Film coating machinewith dryer is used for varies kinds of materials coating. It is supplied with vacuum pump and heating system, having an precision heating temperature upto 200°C.
- 2 Thefilm coating machineis mainly used for lithium battery electrode coating for coin cell assemble and pouch cell research.
- 3 Thefilm coating machineis mainly used for lithium battery electrode coating for coin cell assemble and pouch cell research.
- 4 Build-in oil-less vacuum pump make the machine with small volume and less noise.
- 5 New designed Touch Screen control make the operating more easy and simple

Machine model	Automatic film coating machine with dryer
---------------	---

	TOB-VFC-150
Source voltage	AC110V-240V, 50/60HZ
Power	650W
Coating speed	0-100mm/s, Step-less transmission Accuracy: 10mm/sec
Advantages	Supply with dry function, vacuum pump
Stroke length	10 - 250 mm adjustable by using Adjustable Position Switch
Platform	Aluminum alloy flat vacuum chuck Vacuum Chuck Dimensions: 300mm(L) * 200mm(W)*30mm(T)
Slicker width	0-150mm
Slicker adjustable range	0.01-3.5mm
Heating dry system	RT-200°C, Digital temperature controller
Temperature control accuracy	±1°C
Dimension	500*350*320mm
Weight	About 40kg
Package size	790*540*600mm
Package weight	65kg
Warranty	One Year limited warranty with lifetime support
Remark	<p>1 One oil-less vacuum pump is inset</p> <p>2 Heating system : Installed on the top cover Built in digital temperature controller with accuracy of +/-1°C Suspension support helps open cover easily and safely. Max. Heating Rate:10°C/min Max. Heating Temp.:200°C</p> <p>3 One 150mm width micrometer adjustable film applicator</p>

Traverse Pusher is included for pushing the Film Applicator to ensure the constant coating speed

PRODUCT DISPLAY

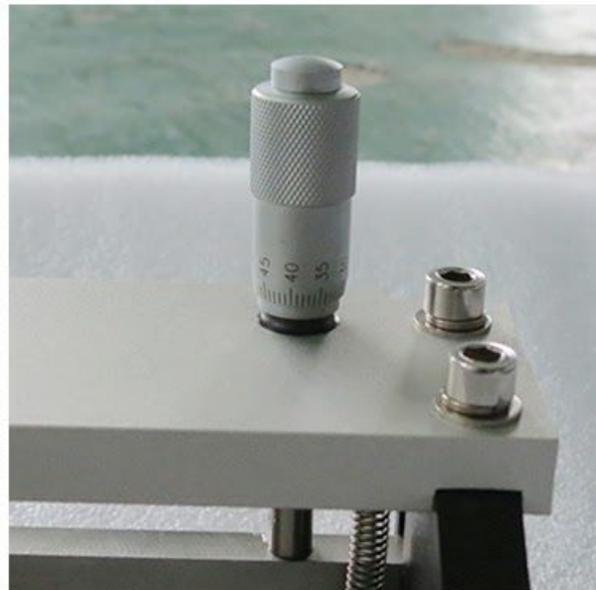



Package

