


Vacuum Pre-Sealing Machine

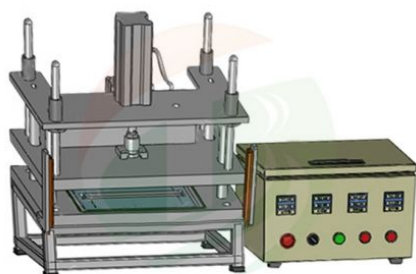

Vacuum pre-sealing machine

- Item No.:TOB-YXY-VPS
- Order(Moq):1set
- Payment:L/C,T/T,Western Union, Paypal
- Product Origin:China
- Shipping Port:XIAMEN
- Lead Time:7days

Product Detail

Vacuum pre-sealing machine

SPECIFICATIONS

The main technical features

1. This device is suitable for (small size) lithium batteries liquid injection, standing, previously evacuated and hot sealing operations.
2. The device is provided with a vacuum chamber, when working the chamber vacuum up to -90KPa, to ensure the air in batteries discharge clean;
3. Device copper head equipped with a thermocouple and temperature control module to ensure that the package temperature constant, good quality packaging;
4. The device is provided with safety grating protection to ensure the safety operation.
5. Process: Device has upper and lower cavity forming a closed working space, after battery in it, made the body vacuum state up to -90 ~ -60kpa, to ensure the air in batteries discharge clean, then sealing by head conduction effect. The equipment specifications.

Head length	350mm (Customized according to customer requirements)
Head width	2~10mm (Customized according to customer requirements)
Sealing edge thickness	0.19~ 0.3mm
Power configuration	AC220V / 50Hz, power 1.5KW
Compressed air	0.6MPa, 5L/min
The vacuum source	-0.095MPa, 50L / min
Weight	about 100kg
The device dimensions (LxWxH)	550 * 450 * 500mm
Production capacity	100 ~ 350EA/H (depending on the workers operating proficiency, small battery simultaneously encapsulate multiple

PRODUCT DISPLAY

