



# SRA<sup>®</sup>

SMART REFLOW ANALYZER<sup>®</sup>



- Laser technology for speed measurement
- Instant insight into oven performance
- Compatible with KIC ecosystem
- Profiler embedded in fixture
- 2 year warranty
- 24 hour customer support

## SRA — Smart Reflow Analyzer<sup>®</sup>

*The smart fixture with integrated profiler*

### Identify and track machine performance and stability

- Built-in conveyor speed measurement (No external sensors needed)
- Heat Transfer Index (HTI)<sup>™</sup> for each zone
- Side-to-side and run-to-run comparisons
- Track individual zone performance over time
- PWI<sup>™</sup> — instant process analysis with a single number

### Basic Features

- Fast and accurate manual data collection
- Single screen overview with key machine information
  - Measured zone temperatures
  - Side-to-side uniformity per zone
  - Oven settings
- Unique pallet design allows for more accurate measure of the ambient air temperature
  - Use as machine validation/verification tool
- Familiar KIC Profiling Software 2G user interface
- Solder paste specification library for process related calculations
- SPC charting with Cpk for process specs; Cm/Cmk for machine related specs
- Profile stacking capabilities for multiple runs between downloading. 30 profile capability

### Advanced Hardware; Material and Design

- LCP (liquid crystal polymer) enclosure for better heat protection and fast cool-down between runs
- Robust and durable enclosure and shield drop tested from 5 feet onto a concrete floor
- Long lasting NiMH rechargeable batteries for a reliable and safe power source
- Both wall socket charging and USB charging direct from a computer

### Built-in Convenience

- Intuitive insight into the oven stability
- Quick data access and sharing
- Real-time profiling via Wi-Fi through Smart Dock<sup>™</sup> pairing using ANT technology (optional)
- Integrated data collection module - no separate profiler needed
- Automatic shutoff for improved battery life
- Secure and easy thermal shield opening and closing
- Instant data analysis
  - Machine stability and repeatability
  - Zone efficiency
  - How well the profile accommodates the process window

Accuracy: .....  $\pm 0.5^{\circ}\text{C}$   
 Resolution: .....  $0.1^{\circ}\text{C}$   
 Internal Operating Temp:  $0^{\circ}\text{C}$  to  $85^{\circ}\text{C}$   
 Sample Rate: ..... 0.1 to 50 per second  
 Data Points: ..... 72K per channel  
 TC Temperature Range: ..  $-150^{\circ}\text{C}$  to  $1050^{\circ}\text{C}$   
 PC Connection: ..... USB 2.0 (Std-A/Micro-B)  
 Power: ..... Internal rechargeable NiMH battery

USB cable connected to PC or power supply  
 10 minute fast recharge for a single profile  
 Wi-Fi: ..... 2.4 GHz  
 ANT: ..... 2.4 GHz  
 Embedded TCs: ..... Type K  
 Dimensions (LxWxH):  
 200mm .....  $432.0 \times 200.0 \times 23.0$   
 305mm .....  $432.0 \times 305.0 \times 23.0$

Vacuum compatibility: .... 1.12kPa (8.40 torr) up to 45 minutes

*Note: The SRA-Smart Reflow Analyzer software, Profiling Software 2G, may interface directly with some oven controllers, eliminating the need for manual setpoint data entry. Please consult your oven supplier for availability.*

Accuracy based on factory calibration.


### SRA Smart Reflow Analyzer Kit Contents

Smart Reflow Analyzer	Software Media
Smart Dock (Wi-Fi - ANT)*	Electronic User Manual
USB Cable (A-Male/Micro-B)	Electronic Hardware Guide
Gloves	Getting Started Guide
Power Supply	Calibration Certificate
USB Software Protection Dongle	Carrying Case

\* These items may vary according to specific models ordered.

### Minimum Computer Requirements

Dual Core / 1 GHz Processor PC with 2 GB RAM  
 2 GB available storage  
 Video 1024 x 768 resolution / 16-bit  
 1 available USB port (for data download or Smart Dock)  
 1 available USB port (for software protection dongle)  
 Visit our website at <http://kicthermal.com/support-download/os-compatibility-chart> for product compatibility with Windows operating systems.

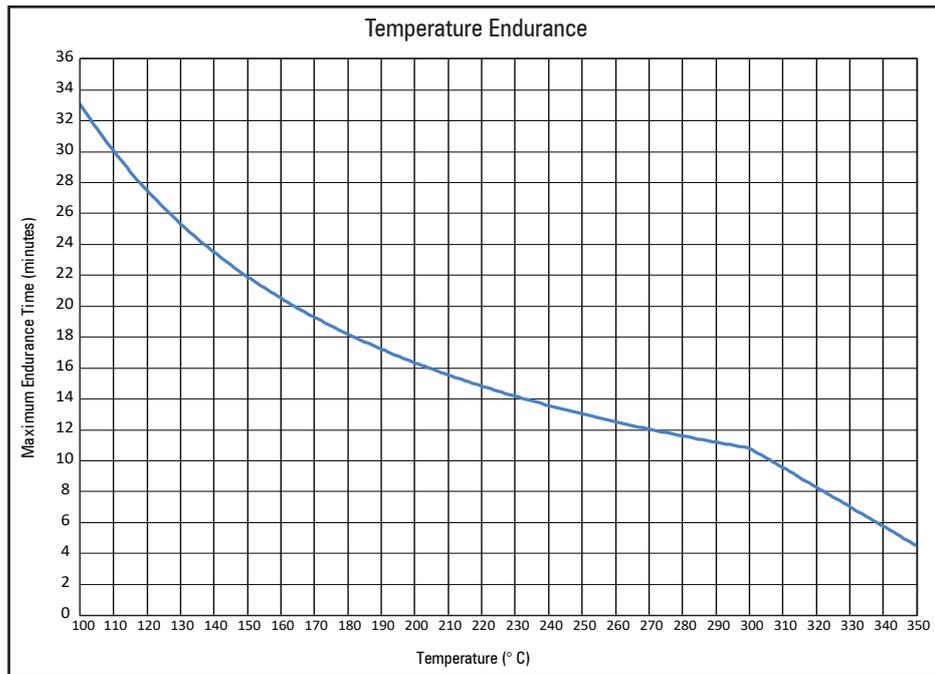

Datalogger Model: data are downloaded to the computer through a USB cable after the run.

Wi-Fi Model: data are sent via Wi-Fi to the computer in real-time during the run. Data are also stored internally for USB download after the run.

### HTI - Heat Transfer Index™ — A measure of a zone's energy transfer in a single number

The HTI™, or Heat Transfer Index, is a measure of the energy transfer occurring in a given zone. Effective heat transfer will generally yield a more homogeneous board temp (tight delta temperature across all components) and can allow for faster conveyor speeds (more throughput). The HTI value is calculated and displayed for each zone as a single number. The display of this index allows for fast and easy identification of changes in the performance of a given zone.

#### Corporate Headquarters

16120 West Bernardo Drive • San Diego, CA 92127 USA  
 +1(858)673-6050 Phone • +1(858)673-0085 Fax  
 sales@kicmail.com • tech@kicmail.com

kicthermal.com kic.cn

#### European Regional Office

europe.sales@kicmail.com • europe.tech@kicmail.com

#### Asian Regional Office

asia.sales@kicmail.com • asia.tech@kicmail.com



All KIC products are designed to give maximum value and fast payback by streamlining your thermal process. Investment in a KIC product is a step toward total process control and quality management. All KIC products come with a no questions asked, 30-day money back guarantee.

Copyright © KIC. All rights reserved. Patents pending. Specifications subject to change without notice. KIC and KIC Thermal Profiling are divisions of and registered trademarks and tradenames of Embedded Designs Inc. SRA-Smart Reflow Analyzer, Heat Transfer Index (HTI), RPI i4.0, SPS, Smart Dock, X<sup>3</sup>, KIC Start<sup>2</sup>, K<sup>2</sup>, KIC Explorer, SlimKIC 2000, KIC 24/7, KIC 24/7 Wave, KIC Vision, KIC Navigator Power, KIC Auto-Focus, KIC Auto-Focus Power, KIC RPM, KIC Carrier, Wave Surfer, KIC MVP, RPI, Process Window Index, PWI, the Lead Free Capable symbol, KIC ON BOARD and the KIC logo are trademarks or registered trademarks of KIC. All other trademarks and tradenames are the property of their respective holders.

For more information on any of our products or service, please visit our website at: [www.kicthermal.com](http://www.kicthermal.com) or [www.kic.cn](http://www.kic.cn).