

SM3636 DATA SHEET

SMB Female to BNC Male Adapter

SMB female to BNC male adapter part number SM3636 from Fairview Microwave is in-stock and ships same day. This Fairview SMB to BNC adapter has a female to male gender configuration. SM3636 SMB female to BNC male adapter operates to 4 GHz. The Fairview Microwave RF adapter provides good VSWR of 1.35:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connnector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Interface Specification

•								
Description		Min		ур	Max		Units	
Frequency Range		DC				4	GHz	
VSWR					1.	.35:1		
Specifications	by Frequ	ency						
Description	F1	F2	F3		F4	F5	Units	
Frequency Range	DC to 2	2 to 4					GHz	
VSWR, Max	1.2:1	1.35:1						
Electrical Specifi Values at 25°C,	sea level.							
Size Length					1.2 in [30.48 mm]			
Weight					0.03131 lbs [14.2 g]			
Description			Connecto	or 1		Connector 2	2	
Туре			SMB Female		BNC Male			
Polarity			Standar	°d	Standard			

MIL-STD-348

MIL-STD-348



Configuration:

- SMB Female Connector 1
- BNC Male Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.35:1 max up to 4 GHz
- SMB interface meets MIL-STD-348
- BNC interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Beryllium Copper Contact

Applications:

- Enables Between Series
 Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 2	Connector 2		
Туре	SMB Female	BNC Male			
Contact Material	Beryllium Copper	Beryllium Copper	Beryllium Copper		
Contact Plating	Gold	Gold	Gold		
Contact Plating Spec.	MIL-G-45204	MIL-G-45204			
Insulation Material	PTFE	PTFE			
Outer Contact Material	Brass				
Outer Contact Plating	Nickel				
Outer Contact Plating Spec.	QQ-N-290				
Body Material		Brass			
Body Plating		Nickel			
Body Plating Spec.		QQ-N-290			
Coupling Nut Material		Brass			
Coupling Nut Plating		Nickel			
Coupling Nut Plating Spec.		QQ-N-290			

Environmental Specifications

Temperature Operating Range


-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

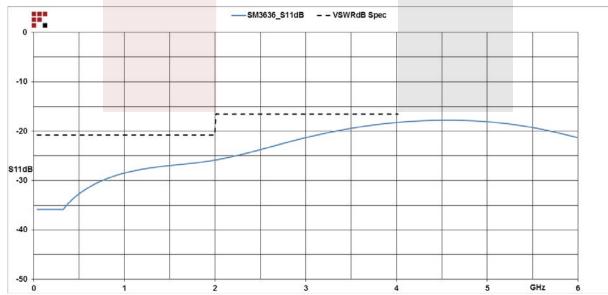

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





SMB Female to BNC Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

The information contained in this document is accurate to the best of our knowledge and representative of the part

For additional information on this product, please click the following link: SMB Female to BNC Male Adapter SM3636

URL: https://www.fairviewmicrowave.com/smb-female-bnc-male-adapter-sm3636-p.aspx

described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.






3FKR5

41742

SIZE A

SCALE N/A

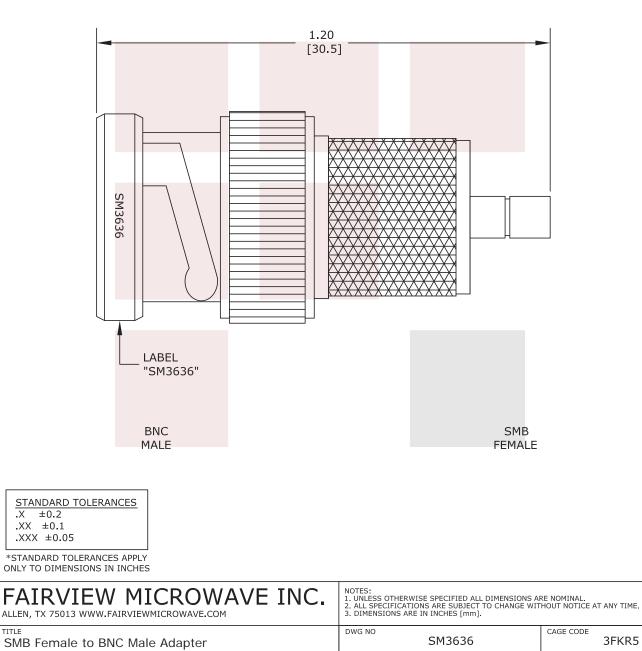

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

TITLE

092016

SHEET

CAD FILE