

## SKD-2000 Series

1.New technology, ergonomic two-color housings, high temperature-resistant, vibration-resistant, friendly holder, fashionable appearance, light, good operation, free from fatigue under long-time using.

2.Low torque 0.2kgf.cm within accuracy  $\pm 3\%$

3.Small, light body 270g. Specially design for the precise needing of tiny screws.

4.High tech DC motor with parts made in JAPAN with high-quality extra strong magnet, low electric current, stable running, high stability and automatically stop as the screw fastened.

5.0-8 stepless torque adjustment, rotation speed selected by switches. Hi & Lo.



6.Best for industry of cell phones, digital cameras, notebook computers, PDA, DVD, MP3, CD-R, LCD and high-tech computer peripheral.

7.Torque fixing ring(KC-4) can be set to fix torque. Slow start is optional for necessity.

8.SKD-2000L Trigger series meet UL, CE approval and ESD is offered for the needs of customer.

## SKD-2000 Series



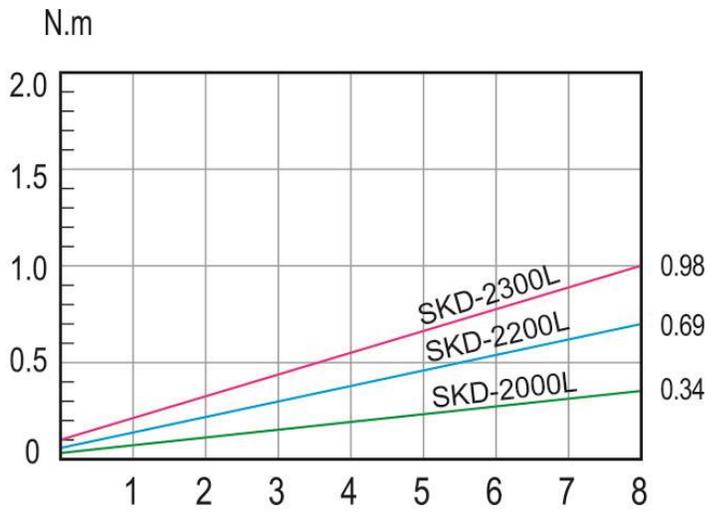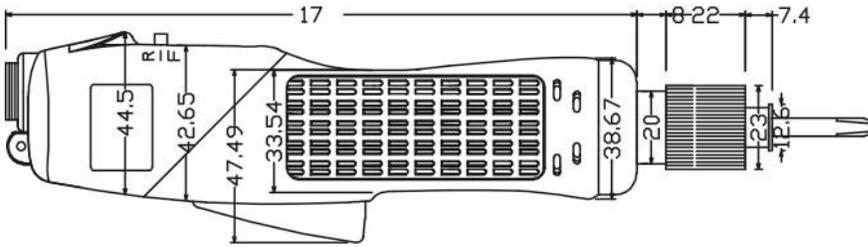

## Product Spec

Model		SKD-2000L	SKD-2200L	SKD-2300L
Input Voltage	DC24V or DC32V			
Power Consumption	25W			
Torque		0.2~3.5	0.5~7	1~10
	(Lbf.in)	0.18~3.01	0.44~6.10	0.89~8.67
	(N.m)	0.02~0.34	0.05~0.69	0.1~0.98
Repeatable Torque Accuracy(%)	±3%			
Torque Adjustment	Stepless			
Free Speed (r.p.m)	HI	1000	1000	700
	LO	700	700	500
Screw Size Dia (mm)	Machine Screw	1.0~2.3	1.4~2.6	1.6~3.0
	Tapping Screw	1.0~2.0	1.4~2.3	1.6~2.6
Weight(g)	270			
Length(mm)	LC/213 / LB/222			
ESD(Anti-Static)	V(With Black housing)			
CE	V			
RoHS	V			
Power Controller	SKP-32HL-60W			
Bit Type				